


ANTICORWrap 762-60

CORROSION PROTECTION

TAPE STRUCTURE

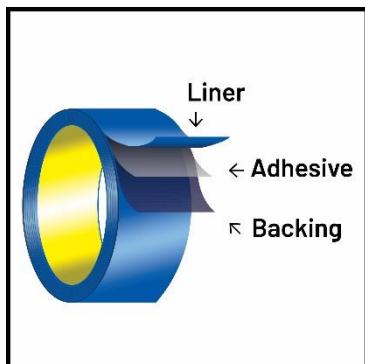

PRODUCT DESCRIPTION

Backing:

- HDPE film.
- Elastomer-modified bitumen.

Liner:

- Release paper.

Colour:

- Black with grey liner.

ANTICORWrap 762-60

Modified elastomeric corrosion protection bitumen tape in monotape corrosion protection according to EN 12068 as a component of the systems as follows:

- class B30 – „monotape” – 2 layers,
- class C30 – „monotape” – 4 layers.

APPLICATION

- In corrosion protection coatings of steel pipelines, steel tanks and fittings in underground and underwater buildings.
- Designed for factory coating rehabilitation (PE, PP).

FEATURES & ADVANTAGES

- Good mechanical resistance.
- Cold applied.
- Excellent dielectric resistance.
- Good flexibility.
- Water and moisture resistant.

USAGE

- Condition the tape before application at 15÷30 °C.
- Apply the tape on the prepared surface covered by primer according to Sa 2½ standard of cleanliness, ISO 8501, St 3 standard of cleanliness is also acceptable.
- Wrap the tape around the surface spirally by hand or hand wrapping machine with tension causing 1-2% width reduction. (please see the detailed coating instruction before application).
- Apply spirally with 50% overlap by hand or wrapping machine.
- For generic waterproofing applications (e.g. joining, connection membrane), peel off the release, put the tape into position and press well.

STORAGE

- Store the product in dry area in original packaging.
- Protect the cartons against mechanical damage.
- The recommended storage temperature: up to 25°C.

PRODUCT FORM & SIZE AVAILABLE

50, 100, 150 mm x 10 m.



ANTICOR Sp. z o.o. holds ISO 9001:2015 certificate.